


## EHF3-Series High Flow Pleated

EHF3-Series High Flow Pleated Filter Cartridges are designed to address the need for critical filtration in high flow applications. Large diameter, high surface area filters dramatically reduce maintenance and production downtime. EHF3 cartridges are a direct replacement for the 3M/Cuno High Flow series cartridges. The EHF3 Series cartridges are available in both polypropylene and microglass media in a wide variety of micron ratings. This filter utilizes polypropylene hardware to provide a robust design. Both the polypropylene and microglass media provide broad chemical compatibility. Filtration efficiencies exceed 99%.



### Flow Rate vs Pressure Drop

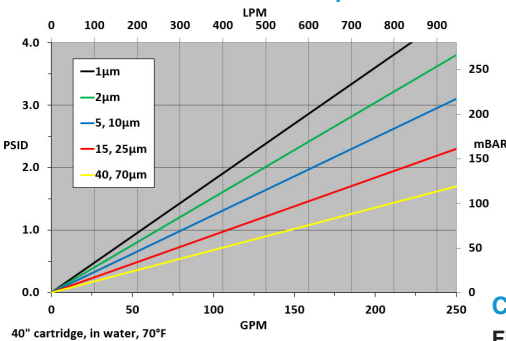

### Dimensions

#### Length:

40, 60 inches

#### Outside Diameter:

6.5 inches

#### Inside Diameter:

3.0 inches

### Construction Materials

- Filtration Media**.....Polypropylene or Microglass
- Support Media**.....Polypropylene
- End Caps**.....Glass-reinforced Nylon
- Center Core**.....Polypropylene
- Outer Support Cage**.....Polypropylene
- O-Rings/Gaskets**.....Buna, EPDM, Silicone, Viton®

### Operating Conditions

- Change Out ΔP (recommended)**.....35 PSID
- Polypropylene Temperature (max)**.....160°F (71°C)
- Microglass Temperature (max)**.....160°F (71°C)
- Differential Pressure (max)** ..... 60 PSID  
(4.1 bar) at 68°F (20°C)

### Sanitization/Sterilization

**Filtered Hot Water**.....80°C for 30 min.

### Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 2002/72/EC, 1935/2004, and/or 10/2011.

### Ordering Information

EHF3	Material	Rating (µm)		Retention	Length	O-Rings
	PP = Polypropylene	1.0	15.0	A = Absolute	40" (101.6 cm)	B = Buna
	FG = Microglass	2.0	25.0	N = Nominal	60 "(152.4 cm)	E = EPDM
		5.0	40.0			S = Silicone
		10.0	70.0			V = Viton®

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.